

LAMINATED POLYESTER FILTERS

5 year

tank & valve warranty

1 year

accessories warranty



Efficient and long-lasting

- Long-lasting and strong laminated tank,
- Perfect esthetic finish,
- UV-resistant,
- Non-corrosive tank.

Easy installation


- 6 way 1" 1/2 or 2" threaded valve included,
- 3-part unions 1" 1/2 X 50mm or 2" X 63mm plus o'ring included,
- Rotation of the filter during mounting thanks to the swivel foot !

Easy maintenance

- Reliable and resistant oil filled pressure gauge,
- Transparent lid for sight inspection of the filter media.

Features

- Maximum operating pressure 36 psi/2,5 bar,
- Maximum temperature 43°C,
- Standard universal connections,
- Recommended media between 0,5 and 0,8mm.

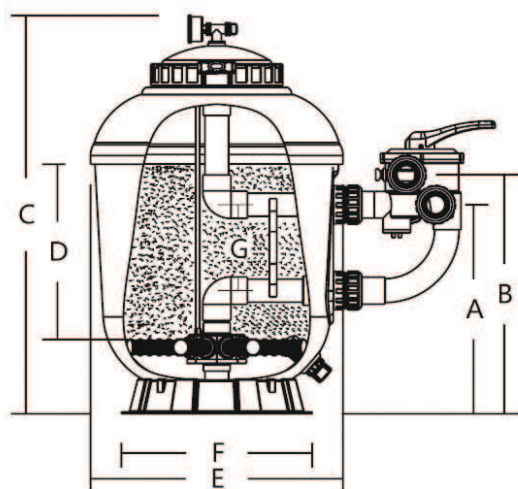

Technical specifications

Reference	Model	Ø Inner filter ⁽¹⁾	Flow rate ⁽²⁾	Filtering surface	Sand ⁽³⁾ Gravel ⁽⁴⁾	6 way valve
EMX-050-0002	SMG500	500mm	10 m ³ /h	0,20m ²	3/1	1"1/2
EMX-050-0003	SMG650	650mm	16,5 m ³ /h	0,33m ²	4/2	1"1/2
EMX-050-0004	SMG750	750mm	22 m ³ /h	0,44m ²	6/3	2"
EMX-050-0005	SMG900	900mm	31,8 m ³ /h	0,64m ²	9/5	2"


⁽¹⁾ Inner dimensions, see overall dimensions below

⁽²⁾ Flow rate given for a filtration speed of 50 m³/h per m² of filtering surface

⁽³⁾ Sand and gravel come in 25kg bags.

Dimensions in mm

Reference	Model	A	B	C	D	E	F	G
EMX-050-0002	SMG500	438	501	835	360	516	390	180
EMX-050-0003	SMG650	453	516	926	380	666	390	180
EMX-050-0004	SMG750	517	603	1023	440	770	500	220
EMX-050-0005	SMG900	570	656	1163	480	920	780	220

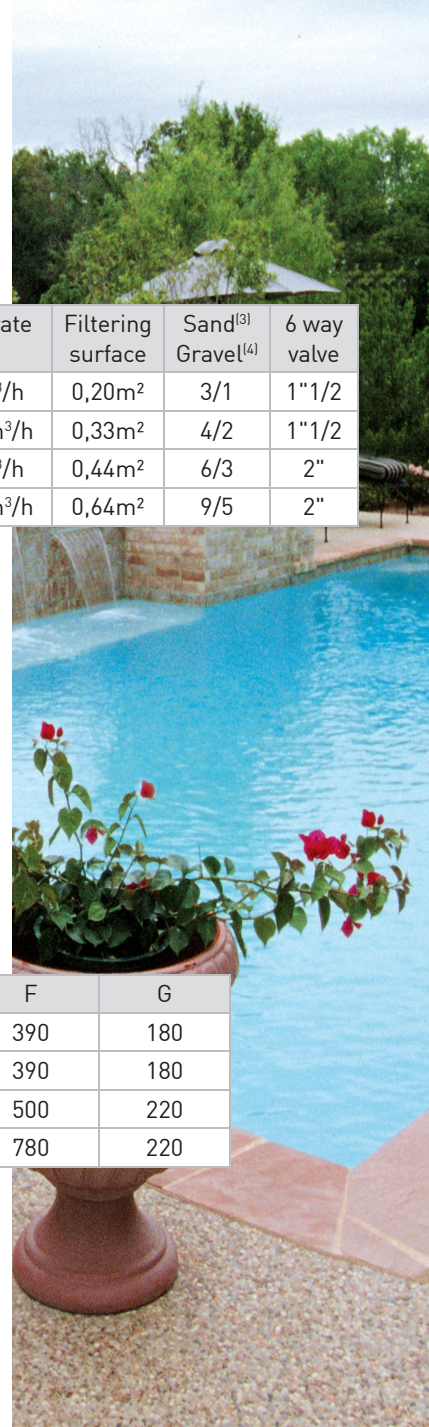

SUPERPOOL I PUMPS

2 year
warranty

PUMP RANGE

By Hayward
SUPERPOOL



COMPATIBLE
electrolyse


Performing and made to last

- Self-priming pump with closed ventilated motor (IPX5)
- Components molded of corrosion-proof reinforced thermoplastics


Technical specifications

- 1 1/2 IN/OUT
- See-thru strainer cover with wing screws
- Drain plug for easy winterizing

Performances

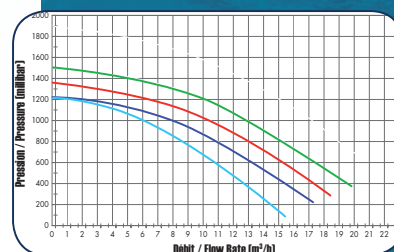

Dimensions in mm

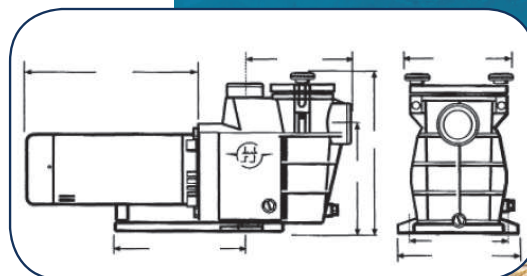

SUPERPOOL II AND II VS PUMP

3 year
warranty

Compatible
salt water
chlorination



Variable speed version
available !
Réf. POWPSCP215MVS

Strong high performance motor


- Thermal protection with automatic reset,
- Extra-large strainer basket

Available also in variable speed version for optimized energy efficiency. énergétique optimisée.


Variable speed (VS) :

- 3 programmable speeds,
- Integrated controller with touch buttons.

Dimensions in mm

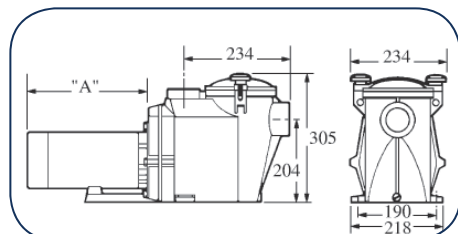

Superpool II Performances

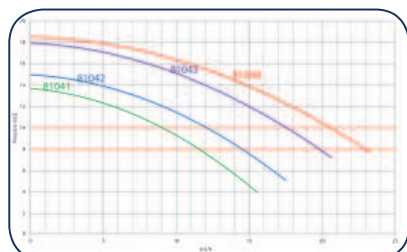

Superpool II VS Performances

