


# SUPERFLO<sup>®</sup>

## SINGLE SPEED PUMPS

SUPERFLO pumps offer the best price quality ratio.

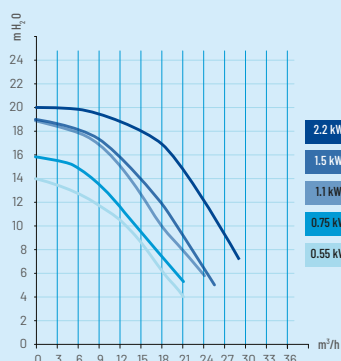

### FEATURES

- XL pre filter basket
- ¼ turn opening lid
- Quick self priming
- One-piece pump body


### BENEFITS

- Longer periods between cleanings
- Easy opening and locking
- Quick and safe start of the pump
- Super silent

### TECHNICAL FEATURES

- 100% Made by Pentair in our Pisa, Italy plant
- Induction asynchronous motor
- Bi-material shaft with Stainless Steel AISI 304 drive-end
- SKF sealed bearings
- Thermal protection (single phase), IE2 compliant (tri-phase <0.75kW), IE3 compliant (tri-phase >0.75kW)
- IP-X5
- Inlet/Outlet → 1.5" BSP tapped
- Ø Unions → 50 mm
- Unions included → No
- Salt resistancy → 0.40%

| Part Number | Flow<br>m³/h @ 8 m | Power output<br>(kW) | (HP) | Volt<br>(V) | Phase | Length<br>(A) (mm) | Weight<br>(Kg) |
|-------------|--------------------|----------------------|------|-------------|-------|--------------------|----------------|
| P-SFL-051   | 12                 | 0.37                 | 0.5  | 220-240     | 1~    | 546                | 13.8           |
| P-SFL-071   | 15                 | 0.55                 | 0.75 | 220-240     | 1~    | 546                | 14.1           |
| P-SFL-073   | 15                 | 0.55                 | 0.75 | 380-420     | 3~    | 529                | 12.5           |
| P-SFL-101   | 18                 | 0.75                 | 1    | 220-240     | 1~    | 577                | 14.6           |
| P-SFL-103E3 | 18                 | 0.75                 | 1    | 380-420     | 3~    | 529                | 13.9           |
| P-SFL-151   | 21                 | 1.1                  | 1.5  | 220-240     | 1~    | 577                | 15.6           |
| P-SFL-153E3 | 21                 | 1.1                  | 1.5  | 380-420     | 3~    | 557                | 22.3           |
| P-SFL-201   | 23                 | 1.5                  | 2    | 220-240     | 1~    | 557                | 17             |
| P-SFL-203E3 | 23                 | 1.5                  | 2    | 380-420     | 3~    | 557                | 23.9           |
| P-SFL-301   | 29                 | 2.2                  | 3    | 220-240     | 1~    | 588                | 23.3           |
| P-SFL-303E3 | 29                 | 2.2                  | 3    | 380-420     | 3~    | 588                | 30             |

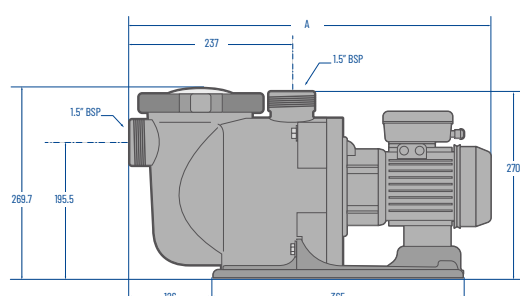

| Packaging | Length<br>(mm) | Width<br>(mm) | Height<br>(mm) | Pce/Palet |
|-----------|----------------|---------------|----------------|-----------|
| Box       | 65             | 32            | 36             | -         |
| Palet     | 120            | 100           | 150            | 18        |